

N 70, Wall-mounted cooker hood, 90 cm, Stainless steel
D95BMP5N0B



COOKING PASSION SINCE 1877


BUY NOW



The coordinating and stylish Neff box hood is modern in design and keeps up with your cooking.

- ✓ Special noise insulation: guarantees an extremely quiet cooking experience
- ✓ EfficientDrive: save energy and enjoy a quieter kitchen thanks to efficient brushless motor technology
- ✓ TouchControl: thanks to the integrated flat surface of the control panel, adjustments can be easily made with just one finger
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ Dimmer Function – easily dim the light according to your mood with the touch of a finger
- ✓ Interval Ventilation – automatically ventilates every hour for crisp, clean air

A

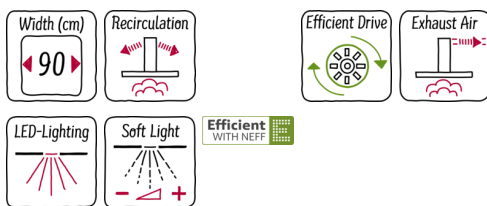

Features

Technical Data

Typology : Chimney
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Height of the chimney (mm) : 582-908/568-1018
 Height of product, without chimney (mm) : 46
 Minimum distance above an electric hob : 550
 Minimum distance above a gas hob : 650
 Net weight (kg) : 20.177
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 427
 Boost position output recirculating (m³/h) : 378.0
 Boost position air extraction (m³/h) : 702
 Number of lights (Stck) : 3
 Noise level (dB(A) re 1 pW) : 55
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable stainless steel
 EAN code : 4242004234913
 Connection rating (W) : 145
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : GB plug
 Installation type : Wall-mounted

Optional accessories

- Z50XP0X0 Long Life odor filter (replacement)
- Z5102X1 Standard odor filter (replacement)
- Z5102X5 Standard recirculation kit
- Z51CXC2N6 Clean Air Plus recirc. kit external
- Z51FXD2N1 Long Life recirculation kit external
- Z51FXJ0X5 Long Life recirculation kit
- Z53XXB1X6 Clean Air Plus odor filter (replacement)
- Z5861N0 Back panel stainless steel
- Z5895N0 Stainless steel back panel
- Z5906N1 Chimney extension 1000 mm
- Z5916N1 Chimney extension 1500 mm



N 70, Wall-mounted cooker hood, 90 cm, Stainless steel

D95BMP5NOB

Features

Key performance features:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate exhaust air according to EN 61591: max. normal use 427 m³/h, intensive 702 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 55 dB dB*

Features

- Stainless steel
- Electronic controls
- Touch control
- Interval operation
- Noise reduction function
- Efficient BLDC technology
- 3 power levels and 2 intensive settings
- Automatic intensive revert (6mins)
- SoftLight with dimmer function
- 3 x 1,5W LED
- Automatic after running (Automatic after running (10 minutes))
- Saturation indicator for metal and charcoal filter
- 3 metal grease filter cassettes
- Steel filter cover
- Easy mounting system

Design

- 90 cm wide
- Chimney hood
- For wall mounted installation
- easy to clean Inner frame

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 427 m³/h Intensive 702 m³/h
- Maximum extraction rate exhaust air 427 m³/h according to EN 61591
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 55 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air: Max. normal use: 55 dB(A) re 1 pW Intensive: 66 dB(A) re 1 pW
- Extraction rate in recirculation mode: Max. normal use: 324 m³/h Intensive: 378 m³/h
- Noise levels in recirculation mode: Max. normal use: 70 dB(A) re 1 pW Intensive: 73 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches: Extraction rate in recirculation mode: Max. normal use: 343 m³/h Intensive: 442 m³/h Noise level in recirculation mode: Max. normal use: 66 dB(A) re 1 pW Intensive: 70 dB(A) re 1 pW
- Power rating: 145 W
- Light Intensity: 359 lux
- Colour Temperature: 3500 K
- Average Energy Consumption: 33.6 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Electrical cable length 1.3 m
- Dimensions recirculating with CleanAir module (HxWxD): 689 x 898 x 500 mm - mounting with outer chimney 795-1139 x 898 x 500 mm - mounting with telescopic chimney
- Additional noise insulation
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Max. extraction rate: 702 m³/h
- Dimensions exhaust air (HxWxD): 614-954 x 898 x 500 mm
- Dimensions recirculating (HxWxD): 614-1064 x 898 x 500 mm

* In accordance with the EU-Regulation No 65/2014