



 **BUY NOW**


# HELIN - 500

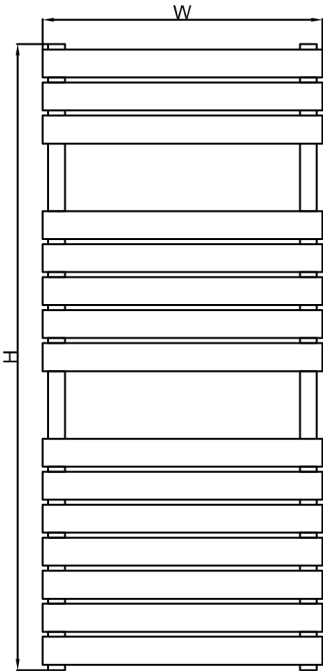


**Front View**

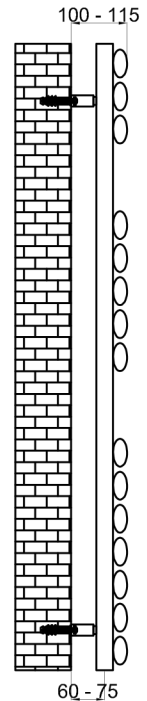

**Side View**

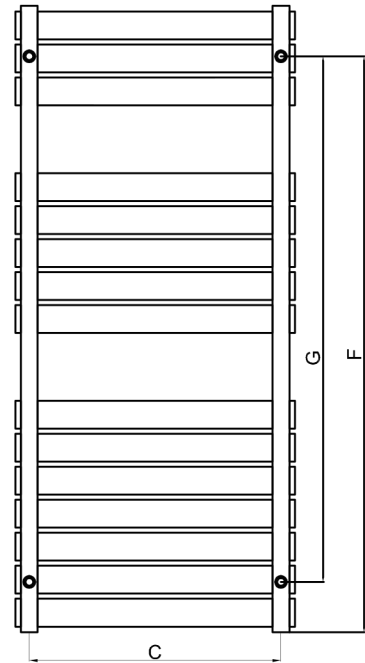

**Back View**

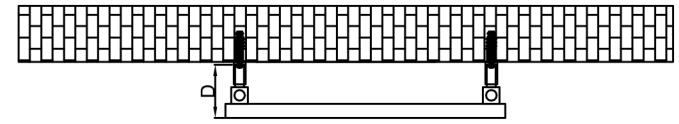

**Top View**

**SUPPLIED INSTALLATION ACCESSORIES**



SCREW 4 PCS



WALL PLUG 4 PCS



BRACKET 4 PCS



GRAB SCREW 4 PCS



ALIEN KEY 1 PCS





AIR VENT 1 PCS



BLANKING PLUG 1 PCS

-Vertical Mounting  
 -Optional 304 QUALITY STAINLESS STEEL TOWEL RADIATOR:  
 (RNS-HLN5112P : HELIN RADIATORS )  
 -POLISHED  
 -Max Operational Pressure: 10 Bar  
 -Inlet/Outlet: 1/2" Female Pipe Thread  
 -All Dimensions are in mm

**MATERIAL DETAILS**



Product Name	Product Code	Height	Width	Thickness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger to Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
		H	W	D	C	S	F	G	-	-	Watt - BTU/hr (Δ50°)
		mm	mm	mm	mm	mm	mm	mm	L	kg	
<b>HELIN 826 X 500</b>	<b>RNS - HLN5080P</b>	826	500	95	450	450	736	637	5.17	7.10	774 - 2640
<b>HELIN 1120 X 500</b>	<b>RNS - HLN5112P</b>	1120	500	95	450	450	1030	940	7.71	10.34	1084 - 3696
<b>HELIN 1535 X 500</b>	<b>RNS - HLN5153P</b>	1535	500	95	450	450	1445	1355	10.30	13.90	1396 - 4762

